



SpeechLine Digital Wireless





SpeechLine Digital Wireless

Overview

The new SpeechLine digital wireless radio microphone system is the perfect tool for speeches, lectures or seminars thanks to its high level of reliability, simple operation, excellent intelligibility and encrypted signal transmission. The intuitive menu navigation, displayed on a large, brilliant OLED display, makes operation significantly easier.



Optimum Speech
Intelligibility

Dedicated to speech

EQ presets for male and female voices, preconfigured sound profiles and a 7-band graphic EQ leave nothing to be desired in terms of audio quality and intelligibility.

Ease of use

All relevant parameters are automatically managed by the system. The sets are delivered in a "paired" state and are therefore ready for use immediately after unpacking.




License-Free
Operation



Future-proof 1.9 GHz

License free and future proof

SpeechLine Digital Wireless uses the 1.9 GHz band for radio transmission, which is available almost worldwide and can be used without registration.



Automatic Frequency
Management



Automatic Interference
Management



Automatic Audio Level
Management

Reliability

Automatic frequency and interference management and automatic audio level management work absolutely reliably and therefore without stress.



Advanced 256-bit
AES Encryption

Encryption

An absolutely secure transmission of even secret content is guaranteed by the AES 256 bit encryption.



Software Based
Status Monitoring

Remote control

If necessary, the entire system can be managed and monitored using the SpeechLine DW Remote Control app. Access to output level, audio effects and much more make operation child's play.



Convenient
Recharging

Transmitter power supply

The transmitters come with a Li-Ion battery pack. Depending on your transmitter, the batteries are charged either in the CHG-2 system charger, CHG 2N, CHG-4-N (CHG 2W for Tablestand and Boundary mics), or conveniently on any USB power source. Battery compartments are also available as options to use two standard AA

batteries.

Battery life of transmitters:

- Handheld—15 hrs
- Bodypack—15 hrs
- Tablestand 153—10 hrs
- Tablestand 133—10 hrs

Please also visit the SpeechLine webpage for additional information:

<https://www.sennheiser.com/speechline-wireless-microphone-conferencing-system>

To download our Free Control Cockpit Software, visit:

<https://www.sennheiser.com/control-cockpit-software>



SpeechLine Digital Wireless

SL MCR 2 DW and SL MCR 4 DW - Multi Channel Receiver

The SpeechLine Multi-Channel Receiver with its 2 or 4 channels is the perfect addition to the SpeechLine series. Thanks to its unobtrusive design, the Multi-Channel Receiver can be installed quickly and easily in any room, whether on the wall or ceiling. The device can be operated with a single network cable, thanks to PoE and Dante. Complex analog audio cabling is a thing of the past. The Multi-Channel Receiver also offers a convenient solution for existing installations. Thanks to an integrated auto mixer and the analog mix output, all audio channels can be used simply as a sum signal. The audio mix is also available digitally via Dante, which allows an extension of the existing setup without exchanging the DSP. Due to the bidirectional communication between receiver and transmitter, all settings of the mobile transmitters can easily be made in the Sennheiser Control Cockpit. The receiver's automatic frequency management eliminates the need for manual frequency settings and the automatic interference management guarantees maximum transmission reliability. The user-friendly pairing function ensures a reliable connection between transmitter and receiver. Network integration also makes it possible to remotely control and monitor the receiver via a media control system (e.g. AMX, Crestron). Due to the integrated antennas, a complex antenna installation is no longer necessary.

SL MCR 4 DW



SL MCR 4 DW - front view

SL MCR 4 DW - rear view



SL MCR 4 DW - rear view

WALL MOUNT Adapter



WALL MOUNT - adapter for wall mounting.

Characteristics

- Installation on the wall, on the ceiling or on a tripod
- 2 or 4 SL DW channels
- Analog audio output for existing infrastructure
- 2 Dante interfaces
- Power over Ethernet (PoE)
- Control and configuration via control cockpit
- Status LED for each channel
- Integrated IT / network security standards

SL MCR DW scope of delivery


- Multi-channel receiver SL MCR DW
- Wall bracket
- Drilling template
- Quick start Guide
- Safety instructions
- Manufacturer's declarations



SpeechLine Digital Wireless


SL MCR DW Connections and Application Examples.

The following variants are possible:

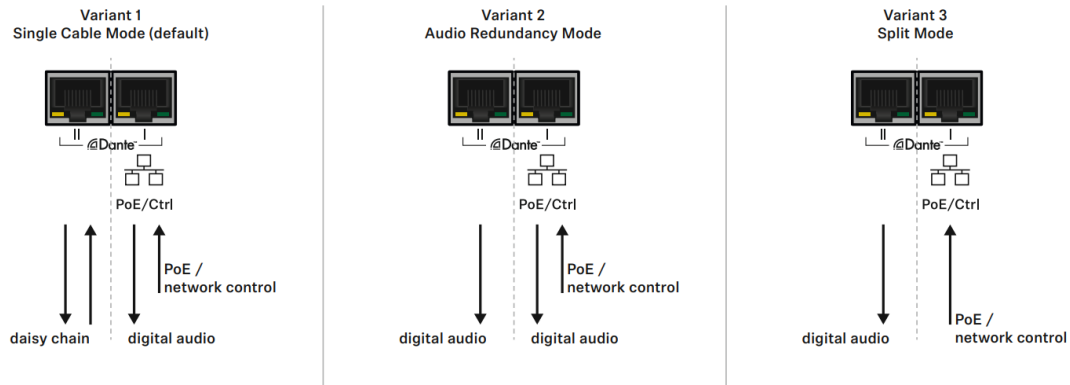

i To configure the variants you need the **Audinate Dante Controller** software: www.audinate.com

Connecting to the network (power supply and configuration)

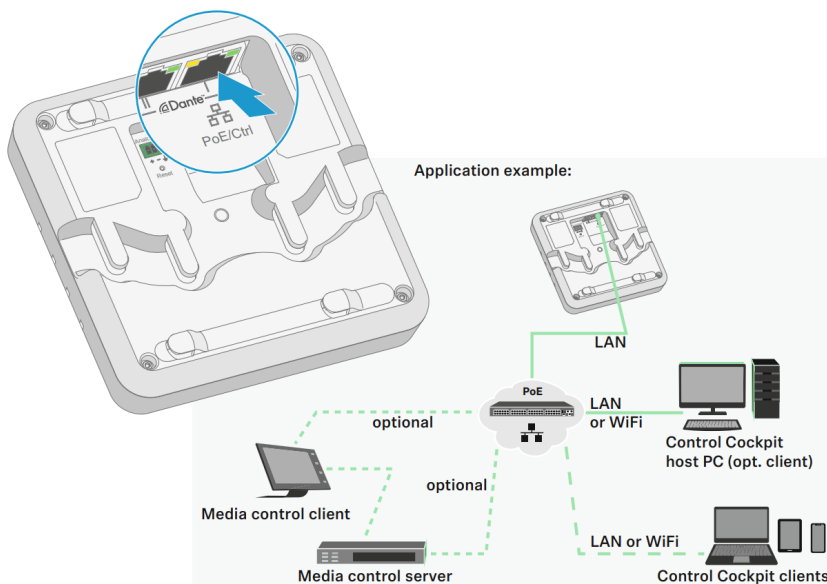

The PoE/Ctrl RJ-45 socket (Dante I) is used to both power the receiver via Power over Ethernet and configure it using the Sennheiser Control Cockpit software (see “Controlling and monitoring the receiver via the network”).


- In your network you can either use a switch that provides PoE or a PoE injector.



SpeechLine Digital Wireless

SL MCR DW Connections and Application Examples (Cont.....)

Outputting digital audio signals

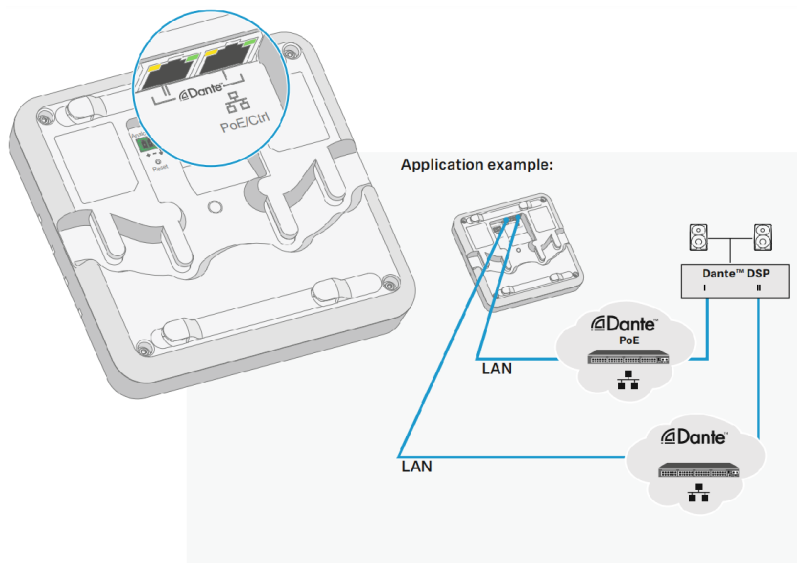


The Dante™ interface with two RJ-45 sockets, Dante I and Dante II, is used for outputting digital audio signals. The interface supports redundant output and daisy-chaining (see above for details).

The digital audio output provides the signals from the individual channels (4 for the SL MCR 4 DW and 2 for the SL MCR 2 DW) as well as the sum signal of the channels.

You can configure in the Sennheiser Control Cockpit whether the sum signal is mixed automatically or manually.

Outputting analog audio signals

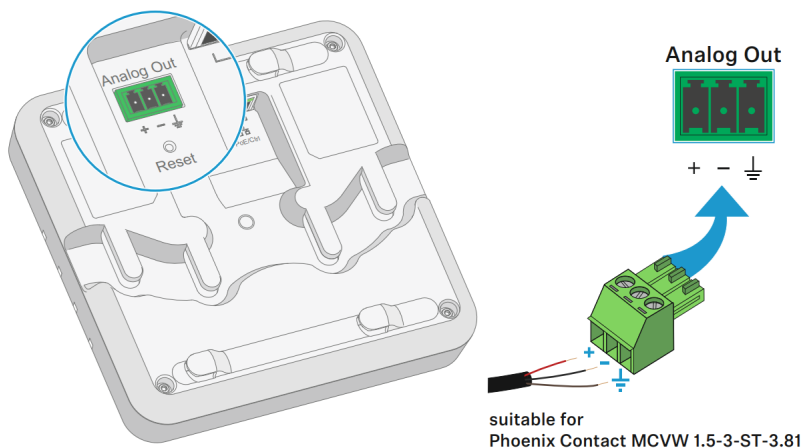

The sum signal of all receiver channels is output from the Analog Out output.

You can configure in the Sennheiser Control Cockpit whether the sum signal is mixed automatically or manually.



SpeechLine Digital Wireless

Transmitter Options

SL Handheld DW



SL Handheld DW - front view

The sleek but robust SL Handheld DW is optimized for speech in presentations or lectures where every word matters. Thanks to bidirectional communication between transmitter and receiver, no settings need to be adjusted on the transmitter. The automatic frequency and interference management allows convenient and reliable operation. The LC display provides the link name, battery status and reception quality. The ergonomically positioned mute-slider makes the use of the microphone very convenient. The SL Handheld DW comes with a rechargeable Li-Ion battery with external charging contacts - for easy charging with the CHG 2, CHG 2N or CHG 4-N- and a USB socket.

FEATURES

- Automatic frequency and interference management
- Speech optimized condenser microphone capsule
- Clear and easy focused user interface
- Long operation time (up to 15 hours)
- Advanced power management and Li-Ion rechargeables
- Secure 256 bit AES encryption
- Remote controllable

SL Bodypack DW



SL Handheld DW - front view

The compact but robust SL Bodypack DW is optimized for speech in presentations or lectures where every word matters. It is compatible with all digitally shielded microphones such as SL Headmic 1 or MKE 1 & 2. Thanks to bi-directional communication between transmitter and receiver, no settings need to be adjusted on the transmitter. The automatic frequency and interference management allows convenient and reliable operation. The LC display provides the link name, battery status and reception quality. The easy-to-access mute-slider makes the use of the microphone very convenient. The SL Bodypack DW comes with a rechargeable Li-Ion battery with external charging contacts - for easy charging with the CHG 2, CHG 2N or CHG 4 N - and a USB socket.

FEATURES

- Automatic frequency and interference management
- Lockable 3.5mm jack socket
- Clear and easy focused user interface
- Long operation time (up to 15 hours)
- Advanced power management and Li-Ion rechargeables
- Secure 256 bit AES encryption
- Remote controllable

SL Boundary 114-S DW



SL Boundary 114-S DW—Top view

The SL Boundary 114-S DW is part of the SpeechLine Digital Wireless product family and dedicated to speech. It is optimized for speech transmission in conference rooms. Being independent from any cables, the SL Boundary 114-S DW offers highly flexible application possibilities for users. Featuring inductive charging the SL Boundary 114-S DW can either be charged wirelessly or via USB. The wireless power transmitter CHG 2W for two mobile devices is available separately. The SL Boundary 114-S DW provides clear battery life indication via dedicated battery status LEDs. The SL Boundary 114-S DW is also compatible with the SL Rack Receiver DW and can be monitored and controlled remotely with the Sennheiser Control Cockpit.

FEATURES

- Wireless inductive charging with the CHG2-W
- Compatible with SpeechLine Digital Wireless family
- Remote monitoring and control with the Sennheiser Control Cockpit
- Operating time of up to 13 hours



SpeechLine Digital Wireless

Transmitter Options

SL Tablestand 133-S DW



SL Tablestand 133-S DW - top view

The wireless SL Tablestand 133-S DW is dedicated to speech. Because of its compatibility with all Sennheiser XLR-3 gooseneck microphones and the legendary Sennheiser capsules, the SL DW Wireless Tablestand 133-S is optimized for podium discussions, speeches and lectures. Being independent from any cables, the SL Tablestand 133-S DW offers a highly flexible solution for users. It features the most common wireless charging standard Qi. It can either be charged wirelessly or via USB. The wireless charging base CHG 2W for two mobile devices is available separately. The SL Tablestand 133-S DW comes with rechargeable accupack with up to 10 hours of operating time. The SL Tablestand 133-S DW can be monitored and controlled with the Sennheiser Control Cockpit.

FEATURES

- Easy wireless charging
- Clear battery life indication via dedicated battery status LEDs
- Compatible with all Sennheiser XLR-3 goosenecks for all speech and lecture applications
- Can be remote controlled with Sennheiser Control Cockpit
- Operating time of up to 10 hours

SL Tablestand 153-S DW



SL Tablestand 153-S DW

The SL Tablestand 153-S DW is dedicated to speech. For a solid connection with the MEG 14-40-L-II B gooseneck microphone, an XLR-5 socket is featured. Being utterly wireless, the SL Tablestand 153-S DW is the perfect solution for ad hoc press conferences or podium discussions in any location. The SL Tablestand 153-S DW features the most common wireless Qi charging standard. It can either be charged wirelessly or via USB. The wireless charging base CHG 2W for two mobile devices is available separately. The SL Tablestand 153-S DW provides clear battery life indication via dedicated battery status LEDs. The SL Tablestand 153-S DW can be monitored and controlled with the Sennheiser Control Cockpit.

FEATURES

- Easy wireless charging
- Clear battery life indication via dedicated battery status LEDs
- Compatible with Sennheiser MEG 14-40-L-II gooseneck for all speech and lecture applications
- Can be remote controlled with Sennheiser Control Cockpit
- Operating time of up to 10 hours

Mini (Stubby) microphone option

MKE 2MINI



MKE 2 – EW which can be used with a bodypack and lanyard to be worn around the neck

Includes:

MZC 2-1 Slip on cap

MZC 2-2 Slip on cap

Protective cover up—for when not in use.



SpeechLine Digital Wireless

Charging Options

CHG 2 UK



The CHG 2 charger makes battery management really easy. The mobile transmitters, while not in use, are charged in the two charging bays. Thus, the devices are always ready-to-use when needed. The bi-color LED provides the status (charging or fully charged). For seamless installation, the external power supply provides the necessary flexibility.

FEATURES

- 2-slot charger for SL DW
- Universal charging slots for either SL Handheld DW or SL Bodypack DW
- Incl. NT 12-4C

CHG 2N UK



The CHG 2N is a network enabled charger featuring two individual charging bays. These can either be used for the SL Bodypack DW or the SL Handheld DW. Each bay is combined with 4 LEDs to indicate the corresponding battery status of the mobile device. The flexible network interface provides IPv4 and IPv6 compatibility for seamless integration. All settings and status information can be monitored and remote controlled with the Sennheiser Control Cockpit.

FEATURES

- Seamless network integration
- 2-slot charger for SL Handheld DW and SL Bodypack DW
- Battery status indication for each bay
- Full remote control
- Incl. power adapter
- Firmware update push to connected devices.

CHG 4-N UK



The CHG 4N is a network enabled charger featuring four individual charging bays. These can either be used for the SL Bodypack DW or the SL Handheld DW. Each bay is combined with 4 LEDs to indicate the corresponding battery status of the mobile device. The flexible network interface provides IPv4 and IPv6 compatibility for seamless integration. All settings and status information can be monitored and remote controlled with the Sennheiser Control Cockpit.

FEATURES

- Seamless network integration
- 4-slot charger for SL Handheld DW and SL Bodypack DW
- Battery status indication for each bay
- Full remote control
- Incl. power adapter
- Firmware update push to connected devices.

CHG 2 W



The CHG 2W is a wireless power transmitter. It provides convenient wireless charging. The CHG 2W is compatible with the SL Tablestand 133-S DW and the SL Tablestand 153-S DW.

FEATURES

- Wireless charging base with Qi charging
- Compatible with SL Tablestand 133-S DW, SL Tablestand 153-S DW and SL Boundary



SpeechLine Digital Wireless

Replacement Battery Options

BA 10



Battery pack for handheld transmitter SKM D1, SKM AVX, and SL Handheld DW, Li-ion, 3.7 V, 2200 mAh

BA 30



Battery pack for bodypack transmitter SK D1, SK AVX, and SL Bodypack DW, Li-ion, 3.7 V, 2030 mAh

BA 40



Battery pack for SL DW Tablestand and Boundary mic 2200 mAh 3.6V output voltage

All batteries shown here are included in the sets and individual components.



SpeechLine Digital Wireless

Set-Variants

SL Headmic Set



Bodypack transmitter
Head Mic 1 headset with omnidirectional characteristics
Robust metal housing
9.5 "rackmount receiver
Clear OLED display
Including transport case or GA 4, power pack, antennas and battery packs

SL Lavalier Set



Bodypack transmitter
Clip-on microphone MKE 1- ew with omnidirectional characteristics
Robust metal housing
9.5 "rackmount receiver
Clear OLED display
Including transport case or GA 4, power pack, antennas and battery packs

SL Handheld Set



Handheld transmitter with microphone capsule MME 865-1
With mute switch
Robust metal housing
9.5 "rackmount receiver
Clear OLED display
Including transport case or GA 4, power supply antennas and battery packs

All sets are available in 2 versions:

- R: Rack variant with GA4 rack installation set
- C: Case variant with transport case



SpeechLine Digital Wireless

Set-Variants

SL TS 133 GN SET DW-3



SL Tablestand 133 — S DW
Gooseneck microphone MEG 14-40 B
BA 40 battery pack
SL Rack Receiver DW (incl.power supply)
GA 4 rackmount kit
Charge via USB or wirelessly via Qi charging

SL TS 153 GN-L SET DW-3



SL tablestand 153-S DW
Gooseneck microphone MEG 14-40-L-II-B with LED light ring
BA 40 battery pack
SL Rack Receiver DW (incl.power supply)
GA 4 rackmount kit
Charge via USB or wirelessly via Qi charging

SL Boundary Set DW-3



SL Boundary 114-S DW
SL Rack Receiver DW (incl.power supply)
BA 40 battery pack
GA 4 rackmount kit
Charge via USB or wirelessly via Qi charging

The above sets are only available as a rack variant with GA4.



SpeechLine Digital Wireless

Set-Variants

SL BODYPACK—MKE 2 KIT DW-3



Bodypack transmitter

Clip-on microphone MKE 2- ew with omnidirectional characteristics

SL BODYPACK—ME 2 KIT DW-3



Bodypack transmitter

Clip-on microphone ME 2- ew with omnidirectional characteristics

SL BODYPACK—MKE 40 KIT DW-3



Bodypack transmitter

Clip-on microphone MKE 4- ew with cardioid characteristics

SL BODYPACK—HM 1 KIT DW-3



Bodypack transmitter

SpeechLine Headmic 1 SB – ew with omnidirectional MKE 1 characteristics

SL BODYPACK—HS 2 KIT DW-3



Bodypack transmitter

Headset Microphone HS 2 BE – ew with omnidirectional MKE 2 Gold characteristics



SpeechLine Digital Wireless

Rack Receiver Antenna technology

AWM 2



Antenna mounting for remote antenna cables in 5, 10 and 20 m optionally available. NOTE—these must **NOT** be PP VARIATION

AWM 4



Antenna mounting for remote antenna cables in 5, 10 and 20 m optionally available. NOTE—these **MUST** be PP VARIATION

CL 5/10/20 CL 1/5/10/20 PP



Antenna cable to connect the AWM 2/4 to the rack receiver

PASC 2




Passive 2-way splitter / combiner for SpeechLine digital wireless microphone systems

PASC 4




Passive 4-way true splitter / combiner for SpeechLine digital wireless microphone systems

2x SL Rack Receiver DW + AWM 2

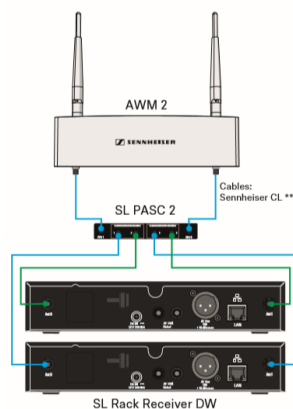


Example wiring diagrams for AWM2, AWM 4, PASC 2 and PASC4

A: 4x SL Rack Receiver DW + AWM 2

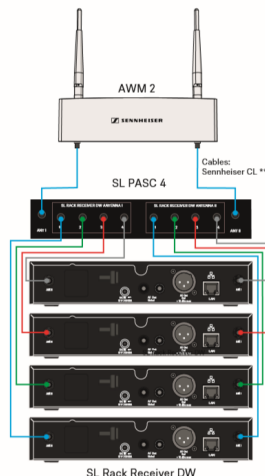

B: 8x SL Rack Receiver DW + AWM 4

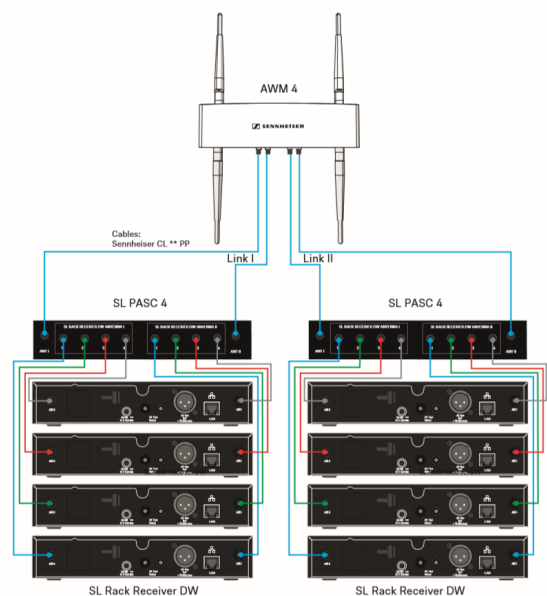

The appropriate cables for the connection between SL PASC 2 and PASC4 and the SL Rack Receiver DW are included in the scope of delivery.



SpeechLine Digital Wireless

Item data

Image	Type	Article Number	Description	MSRP inc VAT (Subject to change)
SpeechLine Multi Channel Receivers				
	SL MCR 2 DW-3	508849	SpeechLine Multi-Channel Receiver with 2 SL DW RF Links. Features Analog output with (2) Dante Interfaces and PoE power supply.	£1,599.00
	SL MCR 4 DW-3	508854	SpeechLine Multi-Channel Receiver with 4 SL DW RF Links. Features Analog output with (2) Dante Interfaces and PoE power supply.	£2,649.00
	SL HANDHELD 865 DW-3-EU	505885	Handheld transmitter SL HANDHELD, includes BA 10, MME 865-1, digital, 1.9 GHz	£569.00
SpeechLine Body Pack and Headmic Kits				
	SL Bodypack DW-3 with SL Headmic 1 SB	509230	Bodypack transmitter and SpeechLine Headmic 1 SB-ew with omnidirectional MKE 1 characteristics	£699.00
	SL Bodypack-HS 2 KIT DW-3	509215	Bodypack transmitter and Headset Microphone HS 2 BE-ew with omnidirectional MKE 2 Gold characteristics	£619.00
SpeechLine Body Pack and Lavalier Kits				
	SL Bodypack DW-3 with MKE 2	509210	Bodypack transmitter and Clip-on microphone MKE 2-ew with omnidirectional characteristics	£529.00
	SL Bodypack DW-3 with ME2	509220	Bodypack transmitter and Clip-on microphone ME 2-ew with omnidirectional characteristics	£439.00
	SL Bodypack DW-3 with MKE 40	509225	Bodypack transmitter and Clip-on microphone MKE 4-ew with cardioid characteristics	£569.00



SpeechLine Digital Wireless

Item data

Image	Type	Article Number	Description	MSRP inc VAT (Subject to change)
SpeechLine Digital Wireless single components				
	SL Boundary 114-S DW-3 B	506607	SpeechLine Digital Wireless conferencing microphone. Includes (1) SL Boundary 114-S DW and (1) BA 40 rechargeable battery	£689.00
	SL TABLESTAND 133-S DW-3 B	506610	Table stand, wireless for MZH 30xx, MEG 14-40 II, XLR3F, includes BA 40, USB cable, digital 1.9 GHz	£669.00
	SL TABLESTAND 153-S DW-3 B	506612	Table stand, wireless for MEG 14-40-L II, XLR5F, includes BA 40, USB cable, digital 1.9 GHz	£699.00
	MEG 14-40-L II B	506398	Gooseneck microphone, condenser, cardioid, 5-pin XLR-M, 12-48 V phantom, 1 articulating point, illuminated ring, 45cm long, black	£229.00
	MEG 14-40 B	504791	Gooseneck microphone, condenser, cardioid, 3-pin XLR-M, 12-48 V phantom, 1 articulating point, 45cm long, black	£199.00



SpeechLine Digital Wireless

Item data

Image	Type	Article Number	Description	MSRP inc VAT (Subject to change)
Charging Equipment				
	CHG 2 UK	506218	2-way charger for BA10 and BA 30, includes power supply NT 12-4C	£179.00
	CHG 2N UK	508986	2-way charger for SL HANDHELD and SL BODY PACK, IPv4/6 network-compatible, includes power pack	£259.00
	CHG 4N UK	506801	4-way charger for SL HANDHELD and SL BODY PACK, IPv4/6 network-compatible, includes power pack	£579.00
	CHG 2 W	506805	2-compartment charger for SL TABLESTAND and interfaces, inductive, Qi standard, including power supply	£259.00
	BA 10	505972	Battery pack for handheld transmitter SKM D1, SKM AVX, and SL Handheld DW, Li-ion, 3.7 V, 2200 mAh	£52.00
	BA 30	505974	Battery pack for bodypack transmitter SK D1, SK AVX, and SL Bodypack DW, Li-ion, 3.7 V, 2030 mAh	£52.00
	BA 40	506656	Battery pack for SL TABLESTAND 133 / 153-S DW-3 B, Li-Ion 3.6 V	£70.00
	B 10	564555	Battery compartment for SKM D1, SKM AVX and SL HANDHELD 2x Mignon AA	£26.00
	B 30	564557	Battery compartment for SK D1, SK AVX, SL BODYPACK 2x Mignon AA	£26.00



SpeechLine Digital Wireless

Item data

Image	Type	Article Number	Description	MSRP inc VAT (Subject to change)
SpeechLine Digital Wireless Sets				
	SL LAVALIER SET DW-3-UK C	505889	Lavalier set, includes MKE 1, stat. Receiver and power pack, transmitter, in carrying case, digital, 1.9 GHz	£1,149.00
	SL HEADMIC SET DW-3-UK C	505890	Headmic set, includes HEADMIC 1, stat. Receiver and power pack, transmitter, in carrying case, digital, 1.9 GHz	£1,279.00
	SL HANDHELD SET DW-3-UK C	505891	Vocal set, includes handheld transmitter + MME 865-1, stat. Receiver and power pack unit in carrying case, digital, 1.9 GHz	£999.00
	SL LAVALIER SET DW-3-UK R	505893	Lavalier set, includes MKE 1, stationary receiver, power pack, bodypack transmitter, GA 4, digital, 1.9 GHz	£1,149.00
	SL HEADMIC SET DW-3-UK R	505894	Headmic set, includes HEADMIC 1, stat. Receiver and power pack, bodypack transmitter, GA 4, digital, 1.9 GHz	£1,279.00
	SL HANDHELD SET DW-3-UK R	505895	Vocal set, includes handheld transmitter + MME 865-1, stat. Receiver and power pack, GA 4, digital, 1.9 GHz	£999.00
	SL TS 133 GN SET DW-3 UK	506618	Set with SL RECEIVER, antennas, SL TABLESTAND, MEG 14-40 II, BA 40, NT, GA 4, digital 1.9 GHz	£1,279.00
	SL TS 153 GN-L SET DW-3 UK	506619	Set with SL RECEIVER, antennas, SL TABLESTAND, MEG 14-40-L II, BA 40, NT, GA 4, digital 1.9 GHz	£1,349.00
	SL Boundary SET DW-3 UK	506617	SpeechLine Digital Wireless microphone set. Includes (1) SL Boundary 114-S DW, (1) SL Rack Receiver DW with power supply, (1) USB cable, (1) BA 40 rechargeable battery and (1) GA 4 rackmounting kit	£1,149.00



SpeechLine Digital Wireless

Item data

Image	Type	Article Number	Description	MSRP inc VAT (Subject to change)
SpeechLine Digital Wireless single components cont...				
	SL RACK RECEIVER DW-3-UK	505892	Stationary receiver SL rack receiver for rack installation, includes power pack, digital, 1.9 GHz	£499.00
	SL BODYPACK DW-3-EU	505883	Bodypack SL BODYPACK, including BA 30, ew jack plug, silver-black, digital, 1.9 GHz	£389.00
	GA 4	505977	Rack mounting kit for EM D1 and SL rack receiver DW, includes antenna front mounting	£48.00
Microphones and capsule				
	MKE 1-ew	502876	Miniature clip-on microphone, omnidirectional, 3.5mm EW jack, for SK 100/300/500, anthracite, accessories not included	£329.00
	MZQ 1	578813	Mini Clip for MKE 1-ew	£8.39
	SL Head Mic 1 BK	506271	Neckband microphone, spherical, black, connection cable 1.6 m, 3.5 mm ew plug	£469.00
	SL Head Mic 1 BE	506272	Neckband microphone, omnidirectional, beige, cable 1.6m, 3.5mm, EW jack	£469.00
	SL Head Mic 1 SB	506904	Neckband microphone, omnidirectional, silver, cable 1.6m, 3.5mm, EW jack	£469.00
	HS 2 BE	508882	Neckband microphone, omnidirectional, MKE 2 Gold capsule EW jack, cable 1.6 m, beige	£309.00
	MME 865-1 BK	502581	Microphone module, condenser, supercardioid, for SKM 100/300/500 G3 and G4, SKM 2000/6000/9000, SKM D1/AVX, SL Handheld DW, black	£219.00
	MKE 2 Mini	700179	MKE 2 – EW which can be used with a bodypack and lanyard to be worn around the neck	£258.98



SpeechLine Digital Wireless

Item data

Image	Type	Article Number	Description	MSRP inc VAT (Subject to change)
Antenna Accessories and parts.				
	AWM 2	505981	Antenna wall fixing, passive, includes 2 rod antennas, metal housing, white	£87.00
	AWM 4	507358	Antenna wall mount, metal housing, white, including 4 rod antennas	£179.00
	CL 5	505976	Antenna cable 5 m, 1 piece, black	£34.00
	CL 10	506263	Antenna cable 10m, 1 piece, black	£66.00
	CL 20	506264	Antenna cable 20 m, 1 piece, black	£119.00
	CL 1 PP	507425	Antenna cable 1 m, RSMAM-RSMAM, 1 ea., black	£29.00
	CL 5 PP	507426	Antenna cable 5 m, RSMAM-RSMAM, 1 ea., black	£34.00
	CL 10 PP	507427	Antenna cable 10 m, RSMAM-RSMAM, 1 ea., black	£66.00
	CL 20 PP	507428	Antenna cable 20 m, RSMAM-RSMAM, 1 ea., black	£119.00
	PASC 2	390040	Passive 2-way True Diversity antenna splitter/combiner for the SpeechLine Digital Wireless microphone series with 2 RF inputs and 4 RF outputs, DECT Range (1880 - 1930 MHz)	£409.00
	PASC 4	390041	Passive 4-way True Diversity antenna splitter/combiner for the SpeechLine Digital Wireless microphone series with 2 RF inputs and 8 RF outputs, DECT Range (1880 - 1930 MHz)	£619.00
	WALL MOUNT Adapter	508891	Wall Mounting Bracket for SpeechLine Multi-Channel Receiver	£84.00